



Always dispose of unwanted tools, accessories and packaging materials in an environmentally friendly manner.



In observance of European Directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE) and its implementation in accordance with national law, electrical goods that have reached the end of their life must be collected separately and returned to an environmentally compatible recycling facility.

Do not dispose of electrical goods with domestic waste materials as inappropriate disposal may cause potential hazards to the environment and human health.

For further information, please contact your local authority or the retailer from whom you purchased the product.



This product does not contain any restricted substances in concentrations and applications which are banned by the European RoHS2 Directive.

DECLARATION OF CONFORMITY

We hereby certify that the Kobe
Insect Killer - 40W - EIK402
complies with all the relevant provisions of the following European Community Directives:

Low Voltage Directive 2006/95/EC

National Standards Applied:
EN 60335-1:2012, EN 60335-2-59:2003 +A1:2006 +A2:2009
and EN 62233:2008

EMC Directive 2004/108/EC

National Standards Applied:
EN 55014-1:2006 +A1:2009 +A2:2011, EN 61000-3-2:2006 +A1:2009 +A2:2009,
EN 61000-3-3:2013 and EN 55014-2:1997 +A1:2001 +A2:2008

Restriction of the use of certain hazardous substances (RoHS2) 2011/65/EU

National Standards Applied:
EN 50581-1:2012

Signed:
Name: Keith Read
Position: HSQE Group Manager

Official Agent:
KENNEDY TOOLS
Wigston, Leicester, England, LE18 2FS.



QUALITY GUARANTEE & WARRANTY

KOBE PRODUCTS carry a one years manufacturers warranty.

KOBE PRODUCTS are designed & produced to the highest standards & specifications

KOBE PRODUCTS are fully guaranteed against faulty materials & workmanship

Should they be found to be defective, they will either be repaired or replaced free of charge (fair wear and tear and/or misuse excepted).

This does not affect your legal rights.

Please retain supplier invoice as proof of purchase.

KOBE TOOLS
THE KENNEDY GROUP LTD, WIGSTON, ENGLAND, LE18 2FS.

Kobe Tools continually strives to improve its products. Specifications may change without prior notice.

KOBE



INSECT KILLER - 40W

ORDER CODE
KBE-787-0140K

MODEL
EIK402



- A safe and hygienic way to eliminate flying insects
- Protective outer mesh
- Low energy consumption
- Removable tray for easy cleaning
- Effective area: 60m²
- Suitable for suspending from a wall or ceiling
- Supplied with hanging chain



OPERATOR'S MANUAL

Read all of this manual before using your insect killer and retain for future reference

You have purchased a quality product that is designed for high performance and long service life. If correct use, safety and maintenance procedures are observed this product will last for many years.

Thank you for choosing our **KOBE** Insect Killer. Your new Insect Killer has been designed using the latest technology. With general maintenance, your Insect Killer will provide years of satisfactory performance. Please read this Owner's Manual carefully before using and save it for future reference.

GENERAL SAFETY

- Always use this Insect Killer only as described in this manual. Other uses not recommended may cause fire, electric shock or injury to persons.
- Only use indoors, within dry rooms and situate this appliance well out of normal reach of children and other people.
- Always turn the Insect Killer to the OFF position and unplug from the outlet when not in use and before cleaning and maintenance.
- Never pull or lift by the cord. To disconnect the Insect Killer, first Switch OFF, then grip the plug and pull it from the wall outlet.
- Never operate the Insect Killer in the presence of explosive and/or flammable fumes.
- Never operate the Insect Killer with a damaged cord or plug or if the product malfunctions, is dropped or damaged in any manner.
- Never immerse in water/other liquids or use in the immediate vicinity of water, such as bath tubs, washing bowls, swimming pools etc where the likelihood of immersion or splashing could occur.
- To protect against electric shock, do not use in a damp or humid atmosphere.
- Do not touch the grill or poke anything inside the grill when in operation as this may cause fire or an electric shock.
- Do not use the appliance standing on the ground. The appliance must be hung from a ceiling or wall by the chains provided.
- Do not use in Barns, Stables and similar locations where the naturally combustible particles in the air create a potential fire risk.
- Do not connect this Insect Killer to any power source other than properly grounded ones. DO NOT attempt to defeat this safety feature. This Insect Killer requires a grounded power source.
- A loose fit between the AC outlet (socket) and plug may cause overheating and a distortion of the plug. Contact a qualified electrician to replace loose or worn outlet.
- If the power cord is damaged, it must be replaced by a qualified electrician or professional technician.

ELECTRICAL SAFETY

In the United Kingdom, the **ELECTRICITY AT WORK ACT 1989** requires all portable electrical appliances, if used on business premises, to be tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year. The **HEALTH & SAFETY AT WORK ACT 1974** makes owners of electrical appliances responsible for the safe condition of the appliance and the safety of its operator. If in any doubt about electrical safety, contact a qualified electrician.

ELECTRICAL SAFETY

An RCCB (Residual Current Circuit Breaker) should be fitted in the mains electricity distribution board. If the power supply is not protected by an RCCB, it is highly recommended that an RCD (Residual Current Device) is used with all portable electrical products.


SPECIFICATIONS

Order Code	KBE-787-0140K	Net Weight	2.94Kg
Rated Power Input	40W	Tube Type	TLD20W x2
Power Supply	220-240V/1ph/50-60Hz	Replacement Tube	KBE-787-0160K
Model No.	EIK402		(Order Code for single tube)

IDENTIFICATION

COMPONENTS

- A. Protective Mesh
- B. Pull Out Tray
- C. ON/OFF Switch
- D. Mains Lead
- E. Fuse
- F. Hanging Chain
- G. Screws & Clips
- H. Bulbs

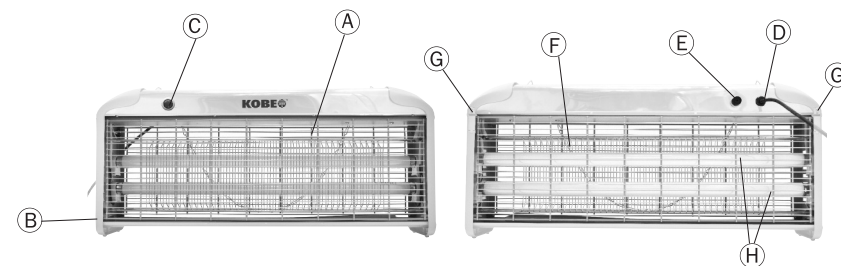

OPERATING

HOW TO USE


- You must first decide on a safe and appropriate position to install the unit. Make sure you have a socket outlet near enough and that it is correctly grounded.
- If the unit is to be hung, site a screw-in cup hook either in the ceiling or wall by which to hang the unit.
- Attach the chain provided to the unit by the clips attached.
- Hang the unit by it's chain, plug in and switch on at the socket and the unit.
- The tubes should glow fluorescent violet and start to attract any nearby insects.
- Insects that are attracted to the light will be killed by the inner high voltage grill.
- If the lights come on but the inner grill is not working, return for replacement or repair to your local KOBE distributor.

CHANGING THE BULB

- To replace the tube, firstly make sure the unit is switched off and disconnected from the power supply.
- Remove the two screws from the top right and left corners of the grill, at the back of the unit. Push down to release and pull out the plastic clips. (See Fig.1 and parts G in Identification).
- Pull the grill towards you so that it comes out from behind the base and lowers down (see Fig.2).
- Take hold of the tube and rotate 90° towards you. The tube can now be removed out of the slot.
- Replace with new tube (Order Code: KBE-787-0160K), rotate 90° away from you to lock in place.
- Replace the grill into the slots, replace the clips and screws.
- If both tubes don't come on, it is unlikely that both have failed at the same time so check the fuse. (See section below)

CHECKING AND REPLACING THE FUSE

- Firstly, make sure that the unit is switched off and disconnected from the power supply.
- Unscrew the fuse holder. (See Fig.3 and part E in Identification).
- Check the fuse and replace if necessary.
- If the fuse continues to blow, you need to have the unit checked by a qualified electrician or return it to your local KOBE distributor.



MAINTENANCE

- To clean your Insect Killer, firstly switch off the unit and disconnect from the power supply.
- Take the unit down from its hook and remove the fly tray from inside the bottom of the unit and clean with soapy water, dry and replace.
- If the outer casing and grills need cleaning, remove the outer grills completely after unscrewing, as shown in 'Changing the Bulb'.
- They can now be cleaned in a degreasant if necessary, dried and replaced.
- The outer casing can be cleaned using a soft cloth dampened with a kitchen cleaner or degreasant but take care not to get it too wet and make sure the unit is thoroughly dry before using.